



Towbar Fitting Instructions
To Suit MERCEDES BENZ VITO VAN
Part Number QTMB426
Rating 2000Kg

1. Ensure all hardware items have been included.
2. Remove shipping hook from end of drivers side rear chassis rail.
3. Remove 2 rubber grommets from vertical taped holes at the end of the passenger side chassis rail.
4. **NOTE:** In certain instances if the vertically taped holes are not found on the passenger side then holes have to be drilled on the passenger side chassis rail in-order to fit the bar. Follow the steps given below:
 - a) Drill holes on the vertical face of the passenger side chassis as shown in Figure 1, using a 25mm hole saw.
 - b) Drill 12.5mm diameter holes on the chassis of the vehicle as shown in Figure 2, on the passenger side.
 - c) Insert the bolt with wires provided into the chassis through the 25mm hole drilled and bolt the tow bar up as shown in Figure 3.
5. Lift Lamp protector cross tube into position aligning with vertical taped holes and fit bolts loosely as per diagram.
6. Lift towbar into position so as to align with holes in ends of chassis rails
7. Fit all bolts as per diagram and tighten to torque listing below.

RECOMMENDED ASSEMBLY TORQUE LISTING

<u>Diameter</u>	<u>Grade 8.8 Bolt</u>
	Nm
M6	9.5
M8	21.7
M10	43.4
M12	77.3
M14	121.0
M16	189.8

FOR TOWING PURPOSES ONLY

For towing capacity details please refer to vehicle owner's manual or to the manufacturer. Overloading can void your warranties.

PLEASE NOTE: You must remove the lug unless you are actually towing if it obscures your number plate. Failure to do so may result in a fine.

Towbar Fitting Instructions
To Suit MERCEDES BENZ VITO VAN
Part Number QTMB426
Rating 2000Kg

Fig 1: Shows hole to be drilled with a 25mm hole saw on passenger side.

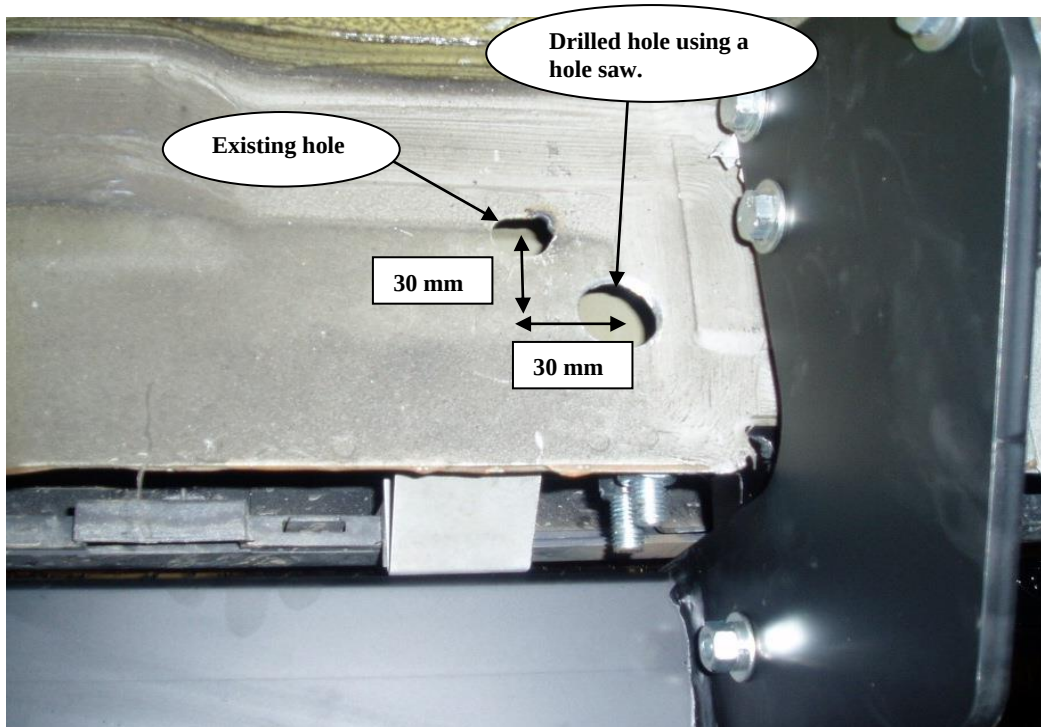



Fig 2: Shows holes to be drilled on the panel on passenger side.



TRAILBOSS

Towbar Fitting Instructions To Suit MERCEDES BENZ VITO VAN Part Number QTMB426 Rating 2000Kg

Fig 3: Shows the passenger side plate bolted up.

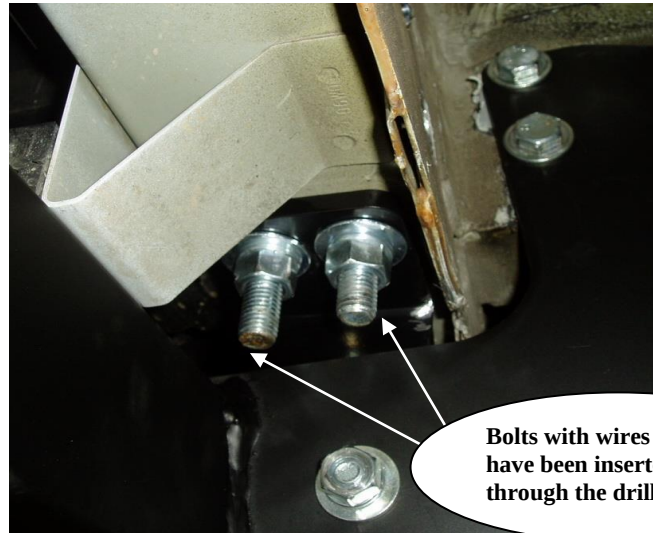

Bolts with wires that have been inserted through the drilled holes.

